

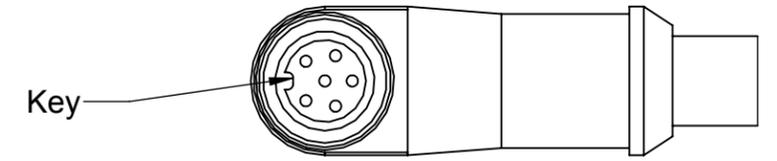
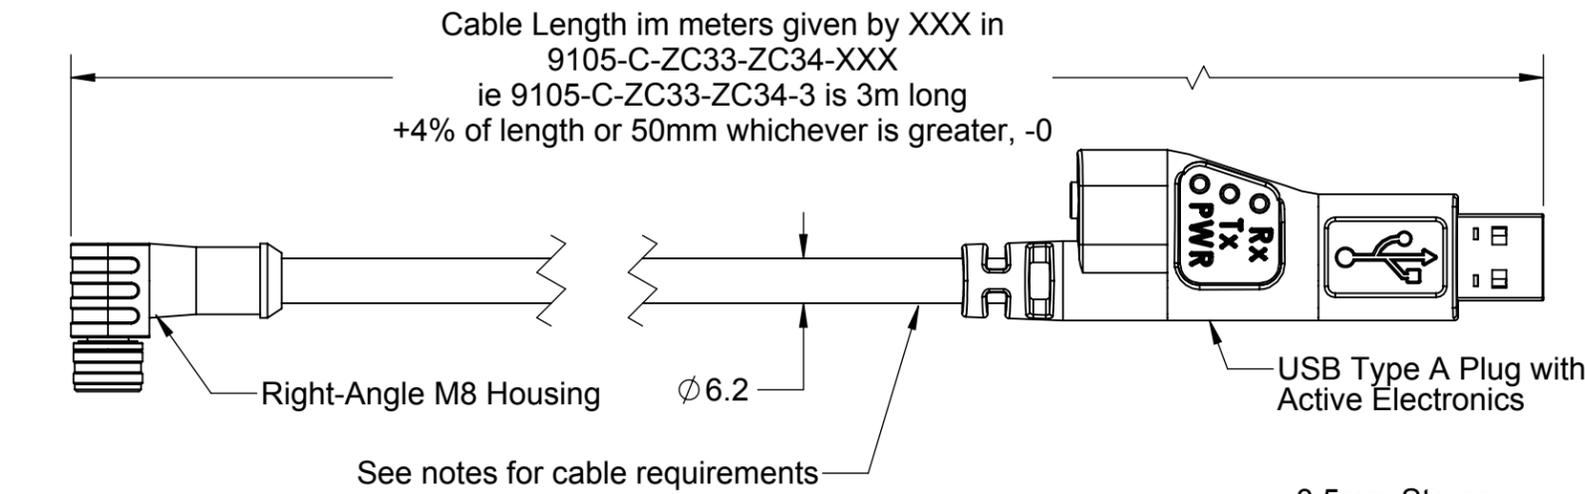
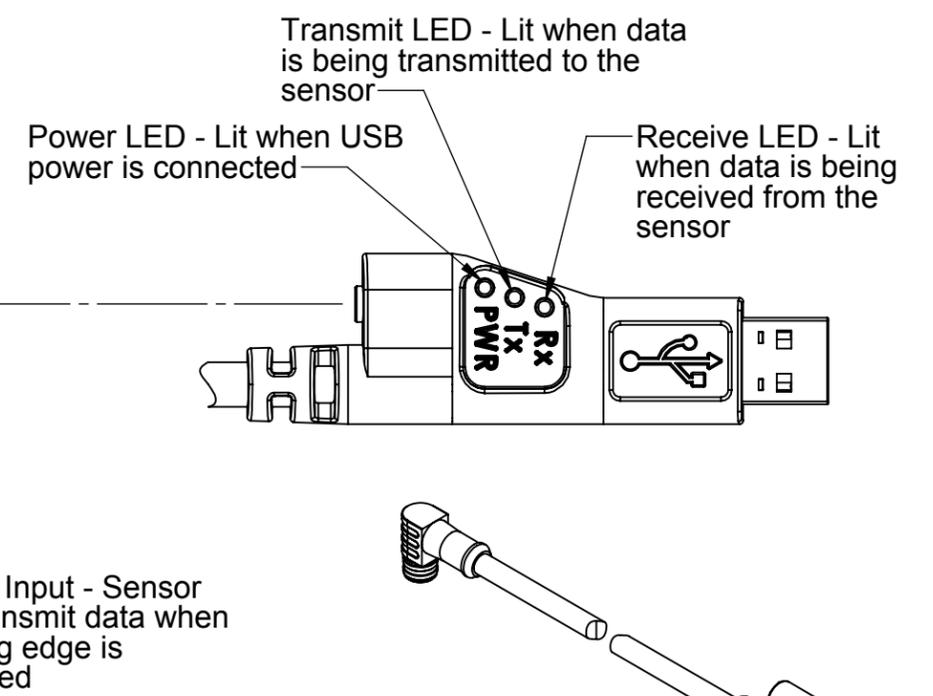


Rev.	Description	Initiator	Date
01	Released	KHS	3/11/2019

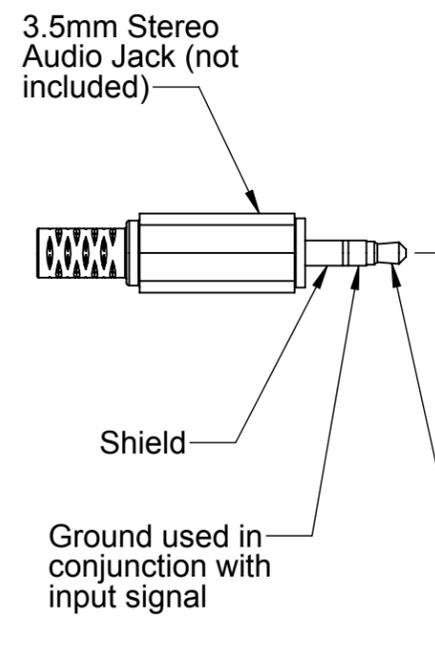

6 Pin Female A-Coded M8 Connector with threaded locking feature - shield passes through the nut

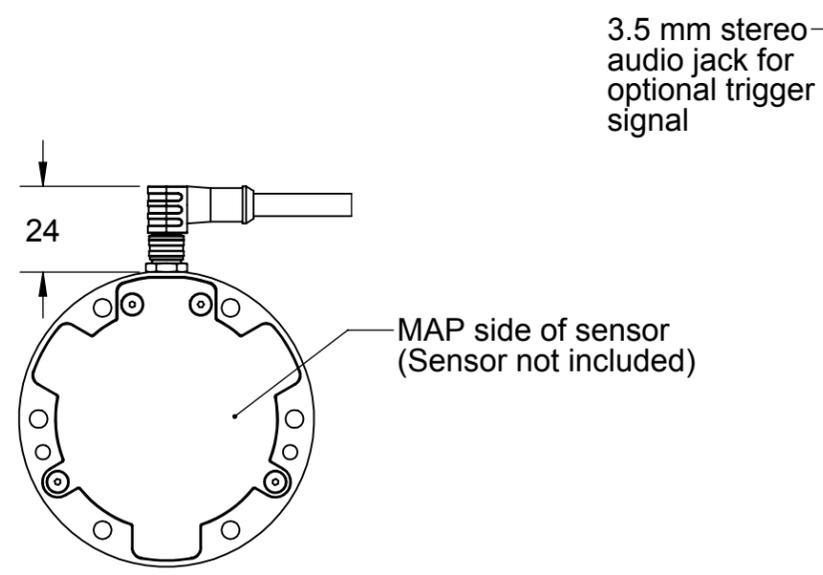

- Notes:**
1. Cable Assembly is RoHS-compliant
  2. Cable is available in 1m, 3m and 10m lengths
  3. Minimum Operating Temperature <-5°C
  4. Maximum Operating Temperature >70°C
  5. Cable is flex rated to at least 1 million bending cycles at a bend radius 10 times the jacket diameter
  6. Cable is torsion rated to at least 1 million torsion cycles of +/-180°/m
  7. Cable is rated to at least IP54 when connector M8 connector is mated. The USB end is not IP rated

NOTES: UNLESS OTHERWISE SPECIFIED.  
DO NOT SCALE DRAWING. ALL DIMENSIONS ARE IN MILLIMETERS.



1031 Goodworth Drive, Apex, NC 27539, USA  
Tel: +1.919.772.0115 Email: info@ati-ia.com  
Fax: +1.919.772.8259 www.ati-ia.com  
ISO 9001 Registered Company

PROPERTY OF ATI INDUSTRIAL AUTOMATION, INC. NOT TO BE REPRODUCED IN ANY MANNER EXCEPT ON ORDER OR WITH PRIOR WRITTEN AUTHORIZATION OF ATI.

DRAWN BY: K. Schnatter 2/6/2018		TITLE	
CHECKED BY: A. Glusiec 4/19/2018 D. Fleissner 4/20/2018		9105-C-ZC33-ZC34-XXX Customer Drawing	
PROJECT # 170301-1	SHEET 1 OF 1	SCALE 1:1	SIZE B
DRAWING NUMBER 9230-05-1531		REVISION 01	

