

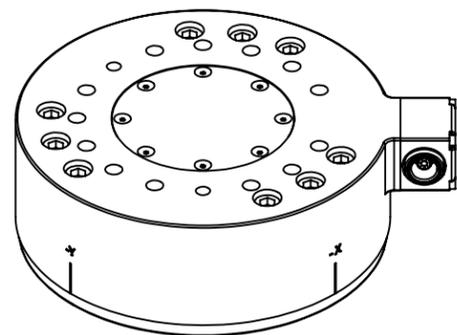
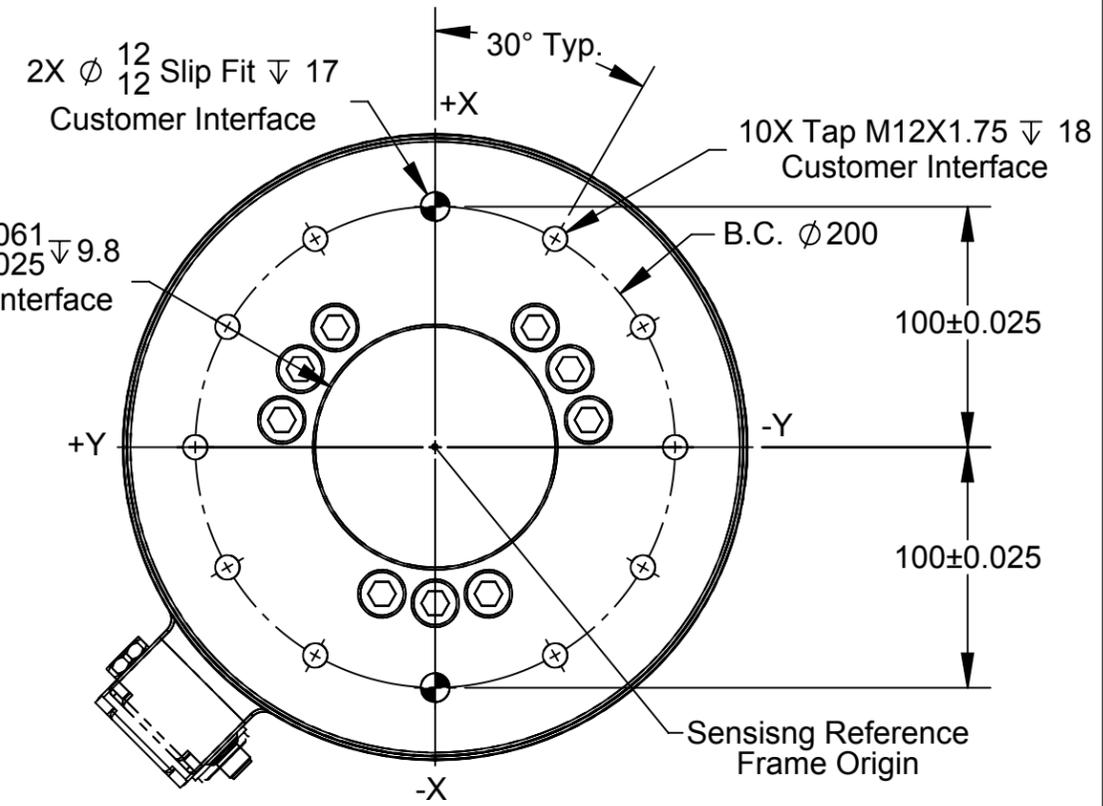
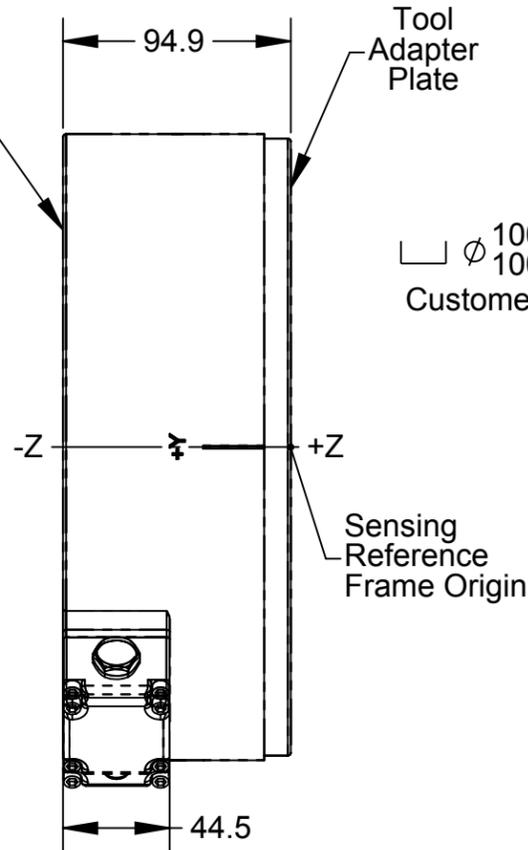


Rev.	Description	Initiator	Date
02	Updated broken text links	RD	05/07/2015

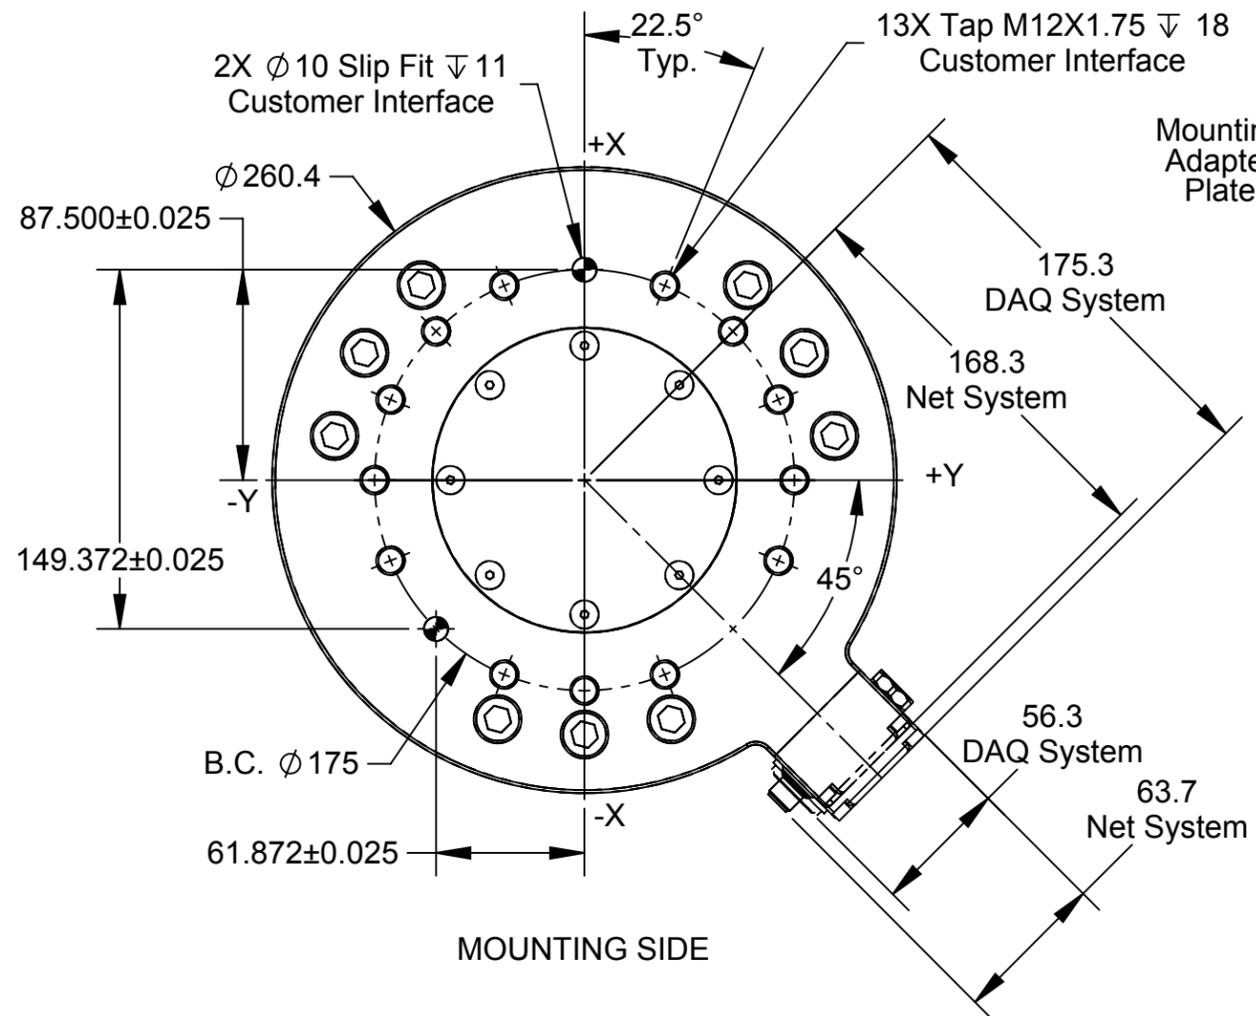

DAQ System
ISOMETRIC VIEW

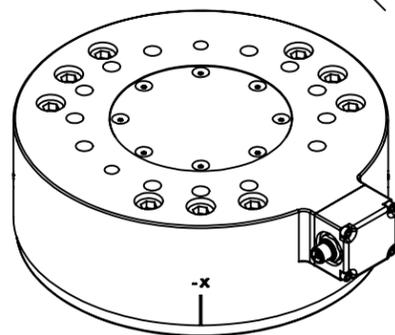

Net System
ISOMETRIC VIEW

Notes:

1. Material: Stainless Steel.
2. Sensing Reference Frame Origin at surface center of Tool Adapter.
3. Do not disassemble transducer. Doing so could damage transducer and will void warranty.
4. For best accuracy, transducer must be mounted to a surface rigid enough to support loads without deflection.
5. Cable must be connected to transducer to maintain proper seal.
6. Cable is IP68 rated only at transducer end. Transducer is IP68 rated in freshwater environment at a depth of up to 10 meters.

NOTES: UNLESS OTHERWISE SPECIFIED.

DO NOT SCALE DRAWING. ALL DIMENSIONS ARE IN MILLIMETERS.



3rd ANGLE PROJECTION



1031 Goodworth Drive, Apex, NC 27539, USA
Tel: +1.919.772.0115 Email: info@ati-ia.com
Fax: +1.919.772.8259 www.ati-ia.com
ISO 9001 Registered Company

PROPERTY OF ATI INDUSTRIAL AUTOMATION, INC. NOT TO BE REPRODUCED IN ANY MANNER EXCEPT ON ORDER OR WITH PRIOR WRITTEN AUTHORIZATION OF ATI.

DRAWN BY: A Pongor 6/17/2014		TITLE	
CHECKED BY: L Fisher 6/25/2014		IP68 Omega251 Transducer	
SCALE	SIZE	DRAWING NUMBER	REVISION
1:3	B	9230-05-1473	02
PROJECT # 140613-1 SHEET 1 OF 1			